

PS-3216A-G2
Fanless LCD Touch Terminal
User Manual

Package Contents

- ✓ Fanless LCD touch terminal.....(x1)
- ✓ Power adaptor.....(x1)
- ✓ Power cord.....(x1)
- ✓ User Manual.....(x1)

FCC NOTES

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CE CLASS A WARNING

This equipment is compliant with Class A of CISPR 32. In a residential environment this equipment may cause radio interference.

AVERTISSEMENT CE CLASSE A

Cet équipement est conforme à la classe A de CISPR 32. Dans un environnement résidentiel, cet équipement peut provoquer des interférences radio.

WARRANTY LIMITS

Warranty will terminate automatically when the machine is opened by any person other than the authorized technicians. The user should consult his/her dealer for the problem happening. Warranty voids if the user does not follow the instructions in application of this merchandise. The manufacturer is by no means responsible for any damage or hazard caused by improper application.

LIMITES DE GARANTIE

La garantie prend fin automatiquement lorsque la machine est ouverte par une personne autre que les techniciens autorisés. L'utilisateur doit consulter son revendeur pour le problème qui se produit. La garantie s'annule si l'utilisateur ne suit pas les instructions d'application de cette marchandise. Le fabricant n'est en aucun cas responsable de tout dommage ou danger causé par une mauvaise application.

警告使用者

此為甲類資訊技術設備，於居住環境中使用時，可能會造成射頻擾動，在此種情況下，使用者會被要求採取某些適當的對策。

SAFETY INSTRUCTIONS

This equipment is not suitable for use in locations where children are likely to be present.

CONSIGNES DE SÉCURITÉ

Cet équipement ne convient pas à une utilisation dans des lieux pouvant accueillir des enfants.

WARNING

Power cord shall be connected to a socket-outlet with earthing connection.

ATTENTION

Le cordon d'alimentation doit être connecté à une prise de courant avec mise à la terre.

BATTERY WARNING

Risk of explosion if battery is replaced by an incorrect type. Dispose of expended battery in accordance with local disposal regulations.

AVERTISSEMENT DE BATTERIE


Risque d'explosion si la batterie est remplacée par un type incorrect. Jetez la batterie usagée conformément aux réglementations locales en matière d'élimination.

警告


本電池如果更換不正確會有爆炸的危險，請依製造商說明書處理用過之電池。

Views of the PS-3216A-G2

Front View

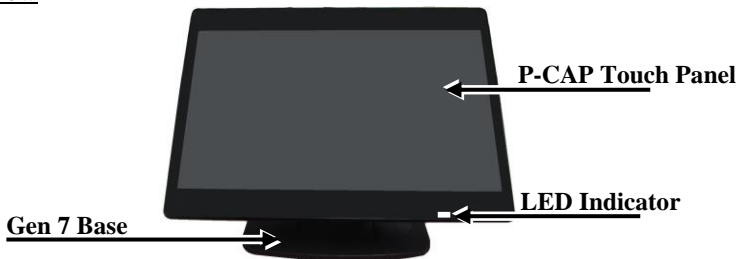


Rear View

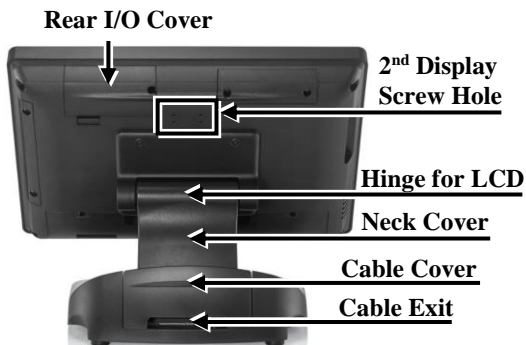


Left Side View



Right Side View

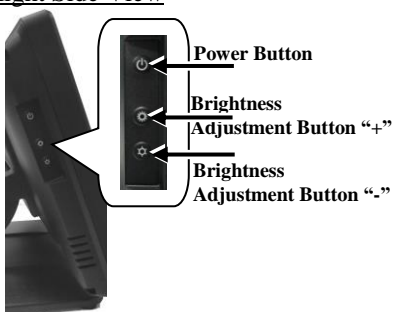

Bottom View

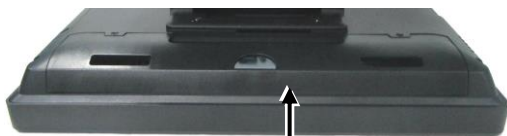

Bottom I/O Cover

View of I/O Interface

Top I/O Ports



1

2

3

1 12V DC-OUT Power Jack
(for Second Display)


2 HDMI Port

3 USB 2.0 Port

- -

※ The top I/O ports are provided for COM-based and USB-based peripheral devices, for example, customer display.

Bottom I/O Ports

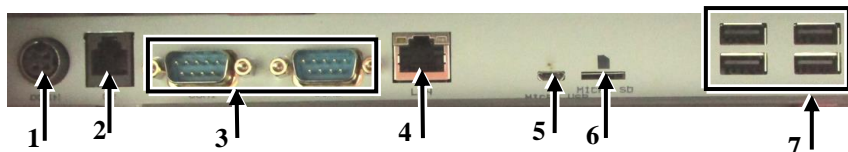

1

2

3

4

5

6

7

1 12VDC-IN Power Jack

3 DB9 Serial COM Port

5 Micro USB Port

7 USB 2.0 Ports

2 Cash Drawer Port

4 RJ45 LAN Port

6 Micro SD Card Slot

Terminal from shipping mode to operation mode

In consideration of proper packaging, before shipping, the terminal is folded, staying in shipping mode. Thus, when receiving the product, you will find that the terminal is well folded, as shown below.




Before operating this terminal, unfold it and make this terminal rise in operation mode by referring to the following steps. Here, an equivalent model with GEN 7 base is taken below for example.

1. Firstly, lift this terminal gently to make it to be unfolded.



2. Overturn this terminal in the direction as indicated by the arrow in the right figure.



3. Place this terminal on a flat table.




4. Tilt this terminal to a degree in the direction as indicated by the arrow below.



5. Remove the cable cover from the base.



6. Fix the base with two #/6/32 screws.

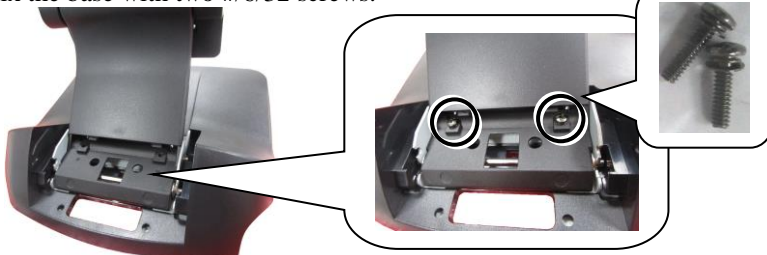

7. Push the cable cover back to the base.




Terminal from operation mode to shipping mode

To fold this terminal, refer to the following steps. Here, an equivalent model with GEN 7 base is taken below for example.

1. Remove the cable cover.



2. Remove the two screws from the base.

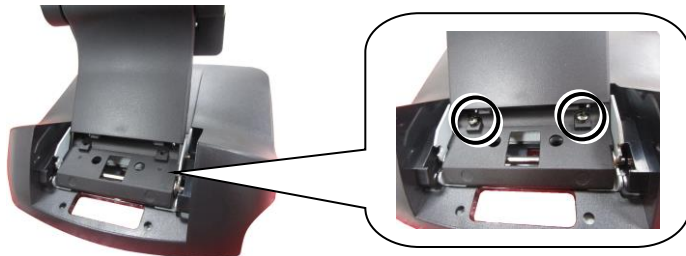

- Carefully hold the lower rim of the display.



- Push the base-folding lever in the direction as indicated by the arrow below (1). Then, the display will be loosen and go down (2).




- When the display goes down to a degree, loose the base-folding lever, as shown in the direction as indicated by the arrow below.



- Then, gently tilt the display in the direction as indicated by the arrow below until the display is well folded.



7. Put back the cable cover.

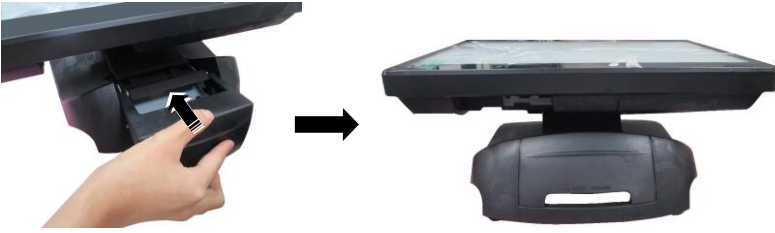

Installing Optional Upgrade Kits and Peripherals

PS-3216A-G2 can work with multiple optional upgrade kits and peripheral devices, such as magnetic stripe reader (MSR), LCD monitor, cash drawer and the like.

Before installing an optional upgrade kit and/or peripheral device, make sure that the system is powered off and the external power source is removed from the POS box to prevent electric hazard! Failure to follow the warning description will void the product warranty!

For the detailed instruction, refer to each of the user manuals of the optional upgrade kits and peripheral devices.

Connecting Power Adapter and I/O Cables

Before connecting power adapter and I/O cables to the I/O ports of PS series terminal, please route and arranging the cables. Refer to the following step-by-step instruction of cable routing and arrangement for the details. Here, an equivalent model with GEN 7 base is taken below for example.

1. Press the circled section of the cable cover with your thumb.



2. Pull out the cable cover.



3. Push and tilt the terminal to the end in the direction as shown by the arrow. Then determine that the terminal is tilted to the end, as shown in the right figure.




4. Press the circled section with two thumbs and pull by force the two sides of the locking hook with two forefingers as indicated by the arrow.




5. Remove the neck cover from the base stand.



6. Tilt the terminal slightly at a little angle in the direction as shown by the arrow, making cables easily pass through the cable passage.

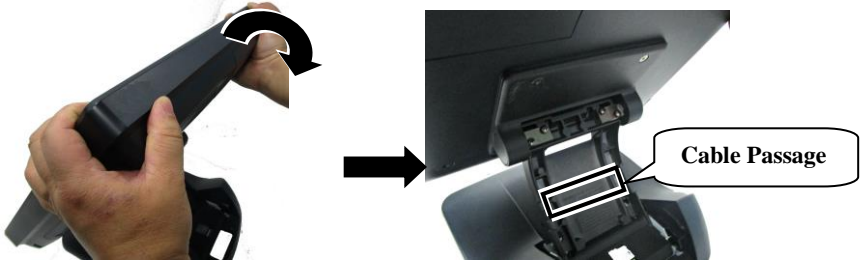

7. Make the connector, which will be connected to the I/O port of the terminal, pass through the cable passage of base stand.

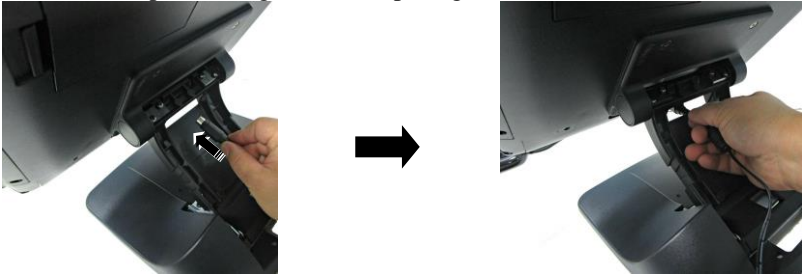

8. Push and tilt the terminal to the end in the direction as shown by the arrow.



9. Remove the bottom I/O cover with your forefinger inserting the middle hole of the cover.



10. Connect the connector of the power adapter to the 12VDC-IN power jack.



11. Cover the bottom I/O interface and gather the I/O cables to the circled cable arrangement area, as shown below.



12. Push and tilt the terminal to the end in the direction as shown by the arrow.




13. Arrange well the I/O cable located at the area of neck cover.



14. Shield the I/O cable arrangement area on the neck of the base stand with the neck cover.



15. Shield the I/O cable exposure area with the cable cover.

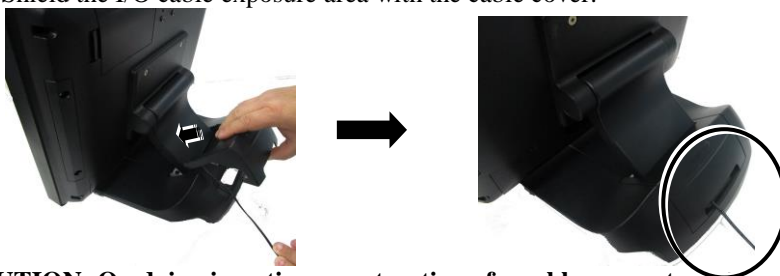

CAUTION: On doing insertion or extraction of a cable connector, please always hold the connector head itself instead of pulling the cable wire. Doing this could damage the cables and ports, which is considered as an artificial damage and is not covered by the warranty. The means of power cord should be connected to a socket-outlet with earthing connection.

ATTENTION: Lors de l'insertion ou de l'extraction d'un connecteur de câble, veuillez toujours tenir la tête du connecteur elle-même au lieu de tirer le fil du câble. Cela pourrait endommager les câbles, ce qui est considéré comme un dommage artificiel et n'est pas couvert par la garantie. Le cordon d'alimentation doit être connecté à une prise de courant avec mise à la terre.

Powering ON the PS-3216A-G2

After connecting the power cable to the power jack of the terminal, press the power button to power on the terminal. To power it off, press the power button again.

Once powering off the system, if you want to power it on again, please wait at least 3 seconds.



If the system hangs due to a reason, such as software resource conflict, please press and hold the power button for over 10 seconds to forcedly shut down the system.

Power LED Indicator

LED status indicator, which is located at the lower right side of the LCD panel, is mainly responsible for notifying users of the current system status by emitting various LED signals. The table provided below shows all the possible LED status as a quick reference.

LED	Status	Description
POWER	Solid blue	System power ON
	Solid orange	System standby

Operation Environment

This terminal must NOT be operated in an environment with restricted ventilation. There must be at least 25 mm air clearance around any top or side ventilation holes with free flow of air around the unit at all times for system operation.

Specifications

System Configuration	Processor	Rockchip RK3568
	System Memory	4GB /8GB DDR4
	Storage Device	32GB / 64GB + Micro SD Card Slot x 1
	OS support	Android 11.0
Display & Touch	LCD	15.6" TFT LCD 1366 x 768
	Touch	PCAP touch panel
I/O & Expansion	Serial Port	2 x DB9 on bottom I/O plate, 5V/12V support by jumper setting
	USB Port (external port)	5, 4 on bottom I/O plate + 1 on top I/O plate
	USB Port (OTG)	1 x micro USB
	LAN Port	1 x 10 / 100 / 1000 Mb
	Display Port	1 x HDMI Port
	CR Port	1, control 2 CR via optional Y-cable
	Power Jack	1 x 12V DC-IN 4-pin power jack for system power 1 x 12V DC-OUT 2-pin power jack for HDMI monitor)
	Audio	1 x internal 2W speaker

	Base Stand	7th generation foldable base stand
	Power Supply	12V/40W
	Expansion Slot	1 x M.2 slot for WiFi/BT
Mechanical	Dimension	372 x 252.7 x 291.4 (W x D x H in mm)
	Weight	4.7 (N.W. in kg)
Environmental	Operating Condition	0°C - 40°C, 20%RH - 90%RH
	Storage Condition	-20°C - 70°C, 10%RH - 90%RH
Regulatory	Regulation Rules	FCC/CE/LVD

※ The product information and specifications are subject to change without prior notice. To get the detailed information on the PS-3216A-G2, please contact your dealer or the service team

<MEMO>

<MEMO>