


RP76- V (R) Receipt Printer



Model	RP76 - V (R) RUGTEK
Print Specifications	Print Method: Thermal Transfer/Direct Thermal, Resolution : 203 dpi, Print Speed: 5inch/s 127mm/sec, RAM: 8MB, Flash: 4MB (expand memory 8MB realizable), Color: Black/Grey
Media Specifications	Paper Width: 26.7-120mm, Print Width : 104mm, Paper Thickness: 60-80mm Paper-cutting width/condition : Max120mm/Leave for 2±0.5mm, not cut off (cut half)
Media Sensor	Continuous Receipt, Label Gap & Black Mark Sensor
Display/Cutter knife	Button: Power ON, Feed, Status & Setting Paper-cutting time : Up to 600 milliseconds / per cycle Paper-cutting frequency : Fastest 60 times per minute
Interface	USB, Optional Bluetooth, WiFi
Command/ OS Support	ESC/POS, CPCL/ WinXP, Win7/8, Android, Linux Supports 1D, 2D & QR Barcode, Multi Language Support
Power	Specification : 24V/2.5A Peak Value : 8A
Dimension(LxWxH)/ Weight	244mm(W)*244mm(D)*172mm(H) / 1.4kg
Environment Parameters	Operating Temperature (°C) : 0° ~ 60° 35%~ 85% (No Condensation) Operating humidity(RH) : 0°C—40°C (No Condensation) Storage Temperature : -10°C~60°C
Accessories	Adaptor, USB cable, Power cable, CD, user manual, paper tray(optional)

Solutions

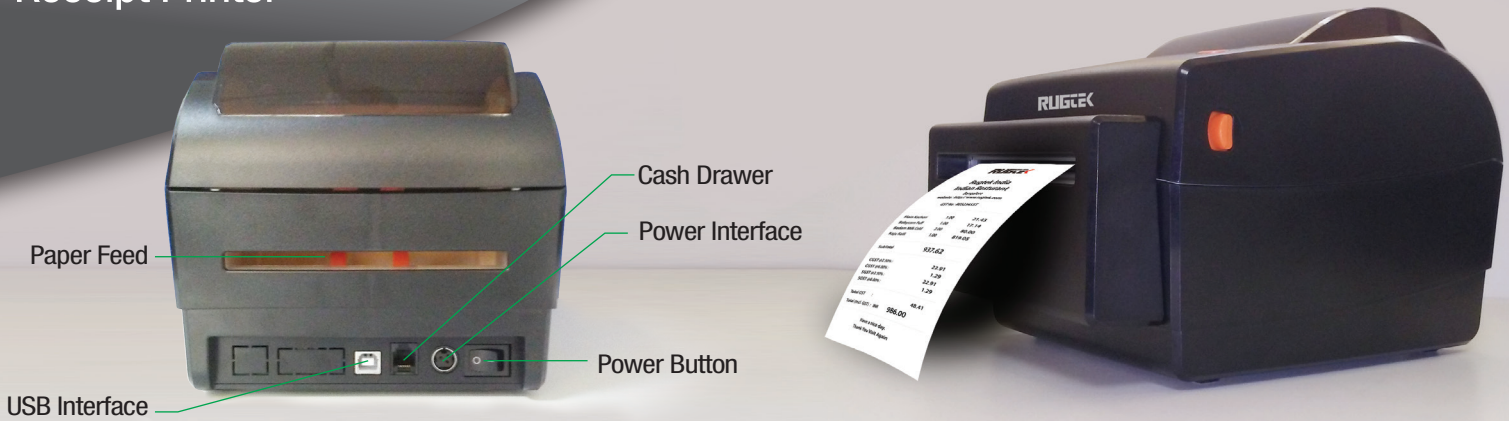

Quick Service Restaurant



Multiplex Ticketing



Food Delivery



Lottery



Utility Transport Ticket



Retail Shops