



Specifications

Model	TX2	TX3	TX6
Printing Method	Direct Thermal and Thermal Transfer		
Resolution	203 dpi (8 dots/mm)	300 dpi (11.8 dots/mm)	600 dpi (23.6 dots/mm)
Printing speed	10 ips (254 mm/s)	8 ips (203.2 mm/s)	4 ips (101.6 mm/s)
Max printing width	4.09" (104 mm)	4.17" (106 mm)	
Max printing length	157" (4000 mm)	79" (2000 mm)	19.6" (500 mm)
CPU / Memory	32-bit ARM Processor / 4 MB FLASH ROM, 8 MB SDRAM		
Media	Width: 4.56" (116 mm) max., 0.79" (20 mm) min. Supply roll: OD 8" (203.2 mm) max., ID 1.5" (38 mm) min. Thickness: 0.0024" ~ 0.012" (0.06 ~ 0.305 mm), including liner		
Ribbon	Ribbon roll: OD 3.3" (84 mm) max., ID 1" (25.4 mm) core Max width: 4.65" (118 mm); Max length: 1968' (600 m). Ink side: In and Out		
Media Sensors	Reflective (Adjustable) / Transmissive (Adjustable)		
Fonts	Five built-in ASCII fonts		
Bar Code Types	ID: Code 39, Code 93, Code 128/subset A,B,C Codabar, Interleave 2 or 5 UPC A/E 2 and 5 add-on, EAN-13/8/128, UCC-128 2D: MaxiCode, PDF 417, Data Matrix, QR		
Interfaces	RS-232 Serial, USB, Centonics Parallel and PS/2		
Dimensions	W 11.3" (286 mm) x D 17.6" (448 mm) x H 11" (280 mm)		
Optional*	External Rewinder, Rotary Cutter and Internal 10/100 Ethernet Interface Card		
Warranty	Printers (except normal wear items) and spare parts: 36 months Wear items (printhead, platen roller) and optional accessories: 12 months		

* Some optional items may require minimum quantities and/or factory installation. Please contact a Postek sales representative for complete details.

All specifications are subject to change without notice.

Label Examples

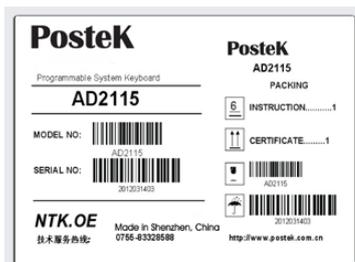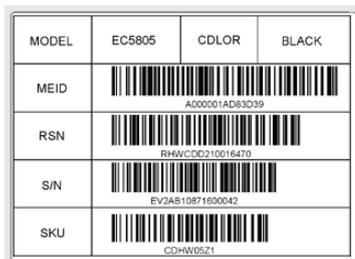

Visit us at www.postektechnologies.com

Postek

Postek Technologies, Inc.
4301 Vineland Rd., Suite E6
Orlando, FL 32811

T | (407) 843.9939
F | (407) 843.9938