


RUGTEK



Print Specifications	Paper width: 58mm/ Roll Dia: 40mm, Resolution: 203 dpi/ Printing Speed: 50 ~ 80mm/sec
Print Font/Barcode	Support most language, CODE39/ EAN-13/EAN-8/ CODABAR/ CODE93/ITF/ QR/PDF41
Paper Feeding Method	Easy Paper Loading
Interface	Bluetooth & USB interface
Power Source	<ol style="list-style-type: none"> 1. 1500mAH rechargeable li-ion battery 2. Continuously working for 6hours or 200m 3. 3-4 hours' charging time 4. Charge through USB or External power adapter
Button/Paper out Alarm	Indicator flashes when printer run out of power and give out two short hoots. When running out of power, buzzle will give out interval warning to indicate charging.
Printing Command/ OS Support	ESC./POS compatible with commands set/ Windows, Android, Linux
Mark position	No
Print Dimension (LxWxH)/Weight	102*108*50/mm/ Weight 260g
Environment Parameters	Temperature working : -10 °C ~ 40 °C Humidity working : 20% °C ~ 85% °C Storing temperature : -20 °C ~ 70 °C Storing humidity: 5% ~ 95%
Media Type/Sensor	Thermal Receipt Paper

Solutions

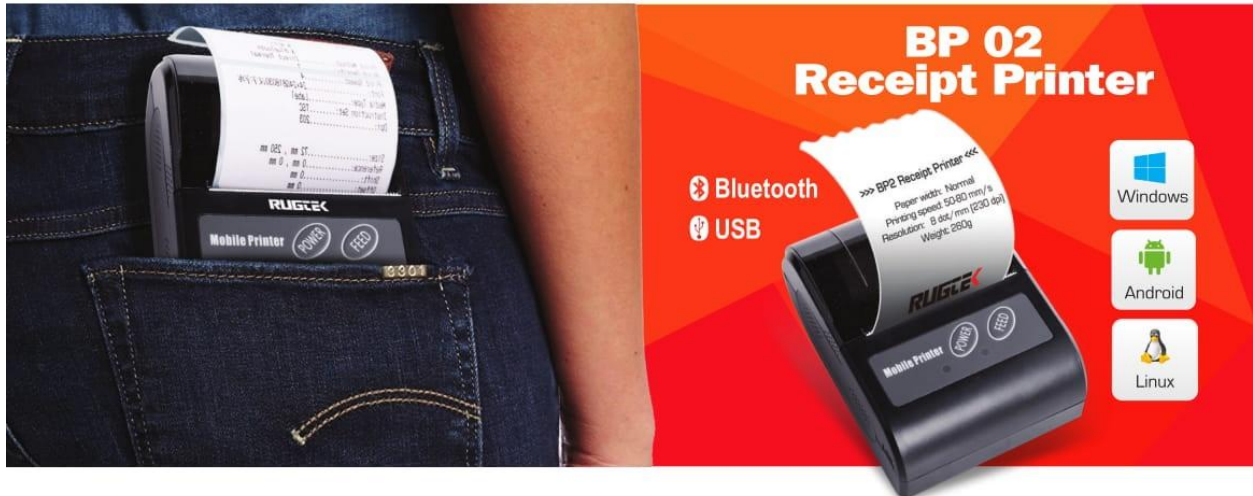